

Patent Application Docket No. 34647-00407USPT

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Barry O'Driscoll

Entitled:

METHOD FOR MONITORING AUTHENTICATION PERFORMANCE IN WIRELESS COMMUNICATION NETWORKS

To the Assistant Commissioner for Patents **Box Patent Application** Washington, D.C. 20231

CERTIFICATE OF MAILING BY EXPRESS MAIL "EXPRESS MAIL" Mailing Label No. EL396078594US Date of Deposit: November 22, 1999 Thereby certify that this paper or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for

Dear Sir:

# REQUEST FOR FILING A NATIONAL PATENT APPLICATION

Transmitted herewith for filing, please find the following:

_X_	1.	Specification, claims and abstract of the above-referenced patent application having _30_ pages.
_X_	2.	Four (4) sheet(s) of drawing(s) ( formal /x_ informal) comprising Figures 1-5B.
_X_	3.	Combined Declaration and Power of Attorneys ( signed _x unsigned).
	3A.	No filing fee, Oath, or Declaration is enclosed pursuant to 37 C.F.R 1.53(d).
	4	Information Disclosure Statement along with Form PTO-1449 and references.

		Doord No. 5 to 17 to 10	-
	5.	This is a: Continuation-In-Part; Divisional; Continuation Substitute Application (MPEP 201.09) of Application Serial No file; reissue of U.S. Patent No filed on	on; led
		An extension to extend the life of the above prior Application to at least the dof filing hereof  (One box must be marked)  (a) is concurrently being filed in that prior Application,  (b) was previously filed in that prior Application,  (c) is not necessary for copendency.	ate
	6.	Attached is an assignment to Telefonaktiebolaget L M Ericsson (publ). <u>Ple return the recorded assignment to the undersigned</u> .	<u>ase</u>
	7.	Priority is claimed under 35 U.S.C. § 119(e) based on filings in the U.S.	
		Application No. Filing Date	
		(1)	
		(2)	
		(3)	
	_	(No.) Certified copy (copies) are attached; or were previously filed	on
	8.	Attached: (No.) verified statement(s) establishing "small entity" status un 37 CFR § 1.9 and 1.27.	ıder
_x_		9. Attached:	
		X_ Return Postcard (Other)	
	10	Preliminary Amendment:	
	<b>P</b> :	ior to a first Office Action, kindly amend the Application as follows:	

11. The following Filing Fee calculation is based on the claims filed less any claims X canceled by the Preliminary Amendment of Item 10.

					SMALL ENTITY RATE		LARGE ENTITY RATE		
BASIC FEE					\$380	<u>OR</u>	\$760	=	\$ 760.00
	NUMBER FILED			NUMBER EXTRA					
TOTAL CLAIMS	24	-20	=	4_ (at least 0)	x 9	<u>OR</u>	x 18	=	+\$ 72.00
INDEP. CLAIMS	_2	- 3	=	_0_ (at least 0)	x 39	<u>OR</u>	x 78	=	+\$
If any <u>proper</u> mu (Enter \$0.00 if the	ltiple dependent nis is a <u>reissue</u> applic		ore impro	oper) is present	+\$130	<u>OR</u>	+\$260	=	+\$
If assignment is >	('d (item 6), add	recording	fee \$40.0	00					\$
Attached is a Rul cannot be rea		ventor ref	uses to sig	gn or					+\$
TOTAL FILING	FEE								=\$ 832.00

- A check in the amount of \$832.00 to cover the Filing Fee calculated in Item 11 is 12.  $\mathbf{X}$ attached. Please charge any deficiency or credit any overpayment to Deposit Account No. 10-0447.
- Please charge my Deposit Account No. 10-0447 in the amount of \$ to cover 13. the Filing Fee calculated in Item 11. This sheet is attached in duplicate.
- The Commissioner is hereby authorized to charge any fee specifically authorized \_X\_ 14. hereafter, or any missing or insufficient fee(s) filed, or asserted to be filed, or which should have been filed herewith or concerning any paper filed hereafter, and may be required under 37 CFR 1.16-1.18 (missing or insufficiencies only) now or hereafter relative to this application and for the resulting Official Document under 37 CFR 1.20, and to have and cause any necessary petition for extension of time to be filed and any fees necessary to be paid for said extension of time OR credit any overpayment to our Deposit Account No. 10-0447, for which purpose a

<u>duplicate</u> copy of this sheet is attached. The Commissioner <u>is not authorized</u> to charge the <u>issue fee</u> until/unless an issue fee transmittal form is filed.

Respectfully submitted,

JENKENS & GILCHRIST, P.C.

Name: Richard J. Moura

Reg. No. 34,883

Jenkens & Gilchrist, P.C. 1445 Ross Avenue Suite 3200 Dallas, Texas 75202 (214) 855-4709 (214) 855-4300 (fax)

10

CERTIFICATE OF MAILING BY EXPRESS MAIL

F139607859445

"EXPRESS MAIL" Mailing Label No.
Date of Deposit

Nov. 33, 1999

I hereby certify that this paper or
fee is being deposited with the U.S.
Postal Service "Express Mail Post
Office to Addressee" service under 37

CFR 1.10 on the date indicated above
and is addressed to the Assistant
Commissioner for Patents, Box Patent
Application, Washington, D.C. 20231

Type or Print Name

Nothing

Michell

Signature

METHOD FOR MONITORING AUTHENTICATION PERFORMANCE IN WIRELESS COMMUNICATION NETWORKS

#### BACKGROUND OF THE INVENTION

## Technical Field of the Invention

The present invention relates in general to the wireless communications field and, in particular, to an improved method for monitoring authentication performance in wireless communication networks.

### Description of Related Art

The Global Challenge (GC) authentication procedure currently used in Time Division Multiple Access/Frequency Division Multiple Access (TDMA/FDMA) mobile communication

10

15

Patent Application Docket #34647-00407USPT P12822US1

systems allows a network operator to validate on the control channel, mobile subscribers' access requests to the network. Each subscriber maintains a unique set of secret authentication keys (i.e., Shared Secret Data or SSD information). This SSD information is used in certain calculations for the authentication procedure. The subscribers' Home Location Register (HLR) also maintains a copy of the subscribers' secret authentication keys.

The way most operators have implemented their existing TDMA/FDMA mobile networks, the Mobile Services Switching Center/Visitor Location Register (MSC/VLR) also maintains a copy of the subscribers' secret authentication keys or SSD information. The main purpose for maintaining the subscriber SSD information in an MSC/VLR is to avoid ANSI-41 message signalling congestion on the transmission link or interface between the MSC and HLR (Reference Point C as defined in the TIA/EIA-41 protocol).

10

15

Patent Application Docket #34647-00407USPT P12822US1

There are a number of different settings needed to ensure that network subscribers are being globally challenged. Examples of these settings are cell indicators and the different access types which are to be globally challenged.

A significant problem with the GC authentication procedures used in existing TDMA/FDMA mobile systems is related to the use of these procedures by an external operator (i.e., an operator for a different network's service provider). For example, if a home network's MSC/VLR maintains a copy (which is done in most networks) of a subscriber's SSD information to be used for authentication purposes, the only ANSI-41 message signalling (apart from an initial access request) conveyed outside the MSC for the GC operation is an Authentication Failure report. This report is generated when a network determines that a fraudulent access request has been made. Conversely, if a network does not determine that a fraudulent access request has been made, then there is no GC-related report generated by the network that would allow an external operator to determine whether or not

10

15

that network's GC function is still active and configured correctly. In other words, for existing TDMA/FDMA mobile networks, an external operator has no proof that another service provider's network (e.g., cooperating in accordance with a valid roaming agreement) has an active GC function. This problem is particularly significant for an external operator of a network having a plurality of roaming agreements with other networks, because the external operator needs assurance that its subscribers are being globally challenged as they roam.

The existing approaches used by network operators to extract authentication information from an MSC are typically proprietary. For example, one application, MDATA, is a proprietary application developed and used by the Ericsson Corporation to extract subscriber authentication information and results from an Ericsson MSC. This approach solves the above-described GC authentication problem to a great extent for Ericsson. However, a significant problem with this and similar proprietary approaches is that an external operator is unable to

10

Patent Application Docket #34647-00407USPT P12822US1

access the application directly in order to extract subscriber authentication results from the MSC where the MS is registered. Additionally, the proprietary authentication applications being used typically do not provide access to data across networks (i.e., no inter-network data transfers are performed). Notably, at present, there are no standardized solutions for reporting a successful GC, neither within one's own network nor to an external network. Nevertheless, as described in detail below, the present invention successfully solves the above-described problems and other related problems.

10

15

#### SUMMARY OF THE INVENTION

In accordance with a preferred embodiment of the present invention, a method for monitoring network authentication performance in wireless communication systems is provided, whereby a standardized message is used to enable external reporting of a selection of (or all) successful GCs. Any network operator can select which GC results are to be reported to external operators, based on one or more factors such as, for example: subscriber number series (i.e., if a subscriber's number is within a predetermined range, then a successful GC can be reported); predetermined periodicity (i.e., the nth successful GC for a subscriber or MSC/VLR can be reported); access type (i.e., a successful GC for a Registration request, Originating Calls, Terminating Calls, and/or Originating Short Messages can be reported), or the successful GCs detected within a specified time duration, SubscriberHLR address, etc.

An important technical advantage of the present invention is that a method is provided for assuring external operators

10

that the GC function is active and appropriately configured for roaming subscribers' terminals.

Another important technical advantage of the present invention is that a non-proprietary, standardized method is provided for assuring external operators that the GC function is active and appropriately configured for roaming subscribers' terminals.

Still another important technical advantage of the present invention is that a method is provided for enhancing the confidence of network operators working together under national or international roaming agreements.

Yet another important technical advantage of the present invention is that a method for monitoring network authentication performance is provided which is hardware independent.

10

15

#### BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method and apparatus of the present invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

FIGURE 1 is a block diagram of an exemplary mobile communications network, which can be used to implement a preferred embodiment of the present invention;

FIGURES 2, 3 and 4A are related diagrams that illustrate how a mobile communications network can report GC information externally (e.g., to the operator of another network), in accordance with a preferred embodiment of the present invention;

FIGURE 4B is a block diagram that illustrates how a mobile communications network can report GC information internally, in accordance with a second embodiment of the present invention; and

FIGURES 5A and 5B are related sequence diagrams that illustrate a third embodiment of the present invention.

10

15

#### DETAILED DESCRIPTION OF THE DRAWINGS

The preferred embodiment of the present invention and its advantages are best understood by referring to FIGURES 1-5B of the drawings, like numerals being used for like and corresponding parts of the various drawings.

Essentially, in accordance with a preferred embodiment of the present invention, a method for monitoring network authentication performance in wireless communication systems is provided, whereby a standardized message is used to enable external reporting of a selection of (or all) successful GCs. Any network operator can select which GC results are to be reported to external operators, based on one or more factors such as, for example: subscriber number series (i.e., if a subscriber's number is within a predetermined range, then a successful GC can be reported); predetermined periodicity (i.e., the nth successful GC for a subscriber or MSC/VLR can be reported); access type (i.e., a successful GC for a Registration request, Originating Calls, Terminating Calls, and/or

10

15

Patent Application Docket #34647-00407USPT P12822US1

Originating Short Messages can be reported), or the successful GCs detected within a specified time duration, SubscriberHLR address, etc.

Specifically, FIGURE 1 is a block diagram of an exemplary mobile communications network 10, which can be used to implement a preferred embodiment of the present invention. Although the exemplary network 10 shown in FIGURE 1 is an ANSI-41 network (i.e., designed in accordance with the ANSI-41 protocol), the invention is not intended to be so limited and can be implemented in any appropriate type of TDMA/FDMA or other mobile communications network (e.g., Advanced Mobile Phone System, i.e., AMPS network, etc.). The basic structure and operation of ANSI-41 networks are known in the communications field. However, for clarity, it is useful herein to briefly describe the entities shown in FIGURE 1.

As such, the exemplary network 10 includes two MSCs (Mobile Switching Centers in ANSI-41 networks) 12 and 14 coupled together by a transmission link 13 (Reference Point E interface

10

15

Patent Application Docket #34647-00407USPT P12822US1

under the ANSI-41 protocol). An MSC functions primarily as an interface for user traffic between the network (10) and other MSCs in the same or other mobile networks, or other public switched networks. An HLR 16 is coupled to the MSC 14 by a transmission link 15 (Reference Point C interface), to a VLR 18 by a transmission link 19 (Reference Point D interface), and to a Message Center (MC) 20 by a transmission link 21 (Reference Point N interface). An MC functions primarily to store and forward short text messages. The VLR 18 is also coupled to the MSC 14 by a transmission link 17 (Reference Point B interface). The MC 20 is coupled to a second MC and a Short Message Entity (SME) 22 by respective transmission links (Reference Point M interfaces). An SME functions primarily to compose and decompose short text messages (i.e., short messages).

FIGURES 2, 3 and 4A are related diagrams that illustrate how a mobile communications network (10) can report GC information externally (e.g., to operator B of network 100), in accordance with a preferred embodiment of the present invention.

10

15

Referring to FIGURES 1-4A, for this exemplary embodiment, a mobile station (MS) 106 subscriber of an external network operator B (100) transmits an access request 108 for network A (10). For this embodiment, it can be assumed that network operators A and B have a valid inter-network roaming agreement, and the subscriber's SSD information has been conveyed from the external MSC/VLR 104, or directly from the external HLR, to the network MSC/VLR (14/18) and stored. It can also be assumed that network A (10) has globally challenged the MS 106, and the GC has been successful (e.g., the MS's identity has been authenticated using the stored SSD information). The GC results 24 and 206 (successful, in this case) are conveyed to the HLR 16 and/or a node in the external operator's network (102) and stored.

Focusing on the sequence diagram shown in FIGURE 3 and the block diagram shown in FIGURE 4A, in accordance with the preferred embodiment, a set of ANSI-41 standard messages is created primarily to allow external reporting of successful GC

10

15

Patent Application Docket #34647-00407USPT P12822US1

results. For example, at any appropriate time, network operator B (100) sends a standard message (e.g., GC Report Directive) 202 in an ANSI-41 signalling message format to the MSC 14, which directs the MSC 14 to create a GC Report (successful) for an external B subscriber's access request, and convey the GC Report message (206) to the external operator's network node 102. For this embodiment, the external operator's network node (102) can be an HLR. Also, for this embodiment, the GC Report Directive message 202 for a successful GC can be used for a plurality of external subscribers and preferably includes one or more of the following parameters (using ANSI-41 notation convention for an INVOKE component): INDICATOR (e.g., indicates presence of a GC Report Directive message); GC REPORT ACCESS TYPE; GC REPORT PERIOD START; GC REPORT PERIOD END; GC REPORT FREQUENCY; GC REPORT HLR ADDRESS; GC REPORT MSCID BEGINNING; GC REPORT MSCID END. The MSC 14 acknowledges a successfully received GC Report Directive message by sending a GC Report Directive Response message 204 (preferably in the ANSI-41 format) to the operator

10

15

Patent Application Docket #34647-00407USPT P12822US1

of network B (100). For this embodiment, the GC Report Directive Response message is sent to the network operator as an acknowledgment message and is not required to include any specific GC-related parameter.

If an access request by an external MS (e.g., 106) produces a successful GC Report message (206) that includes one or more of the above-described GC parameters, a GC Report 206 is sent to an input node (102) in the external network B (100), which can make the report information known to the operator of network B. For this embodiment, the input node (102) in the external network B can be an HLR, for example. Also, the GC Report message 206 is conveyed in an appropriate ANSI-41 signalling message format. In this case, the GC Report message 206 includes the following parameters: GC REPORT (identifies existence of GC Report); ESN (Electronic Serial Number of the external MS); MSID (external MS's identification); GC REPORT TIME; and GC REPORT SUCCESS ACCESS TYPES. A more detailed description of these new GC parameters is provided below. In

10

15

Patent Application Docket #34647-00407USPT P12822US1

this way, by conveying the above-described messages in an ANSI-41 format, the successful results of a network's GC can be provided to an external operator.

Alternatively, as shown in FIGURE 4A, the operator of network B (100) can send a GC Report Directive message (203) via an alternate route through network A (10) via, for example, the HLR 16 in network A. One reason the Report Directive message might be routed via the network A HLR is that the operator of network A may wish to have total control over the ANSI-41 signalling in and out of the MSC/VLR (14/18). An acknowledgment message (e.g., Report Directive Response) can be sent back to the operator of network B either directly to the node B (102) or via network A.

FIGURE 4B is a block diagram that illustrates a second embodiment of the present invention. Referring to FIGURE 4B, a GC successful order message (e.g., GC Report Directive) 202 can be sent to the primary network's MSC (14) from the operator (A) of that network via network A's HLR (16). An acknowledgment

10

15

Patent Application Docket #34647-00407USPT P12822US1

message (GC Report Directive Response) is sent to acknowledge that the MSC has received the GC successful order message (GC Report Directive). For example, the operator of network A can request one or more successful GC Reports (206) for MSs within network A. As another example, the operator of network A can request one or more successful GC Reports (206) for operator B's MSs roaming in network A.

FIGURES 5A and 5B are related sequence diagrams that illustrate a third embodiment of the present invention. Referring to FIGURE 4A, an order for a network (10) to report a successful GC for a specific subscriber can be conveyed to an MSC (14) in an existing ANSI-41 message. For example, the existing ANSI-41 Registration Notification Return Result (RegNot Return Result) message or Qualification Directive (QualDir) message (208) can be modified to include additional parameters for this purpose, such as, for example, GC Report Access Types, GC Report Period Start and End, and GC Report Frequency. In response to an external network subscriber's access request

10

15

Patent Application Docket #34647-00407USPT P12822US1

(108), a successful GC based on one or more of the parameters included in the order message (e e.g., RegNot Return Result or QualDir) can be reported to network A or B's operators in the above-described GC Report message (206).

FIGURE 5B is a sequence diagram that illustrates a different aspect of the third embodiment. Referring to FIGURE 5B, an order for a network (10) to report a successful GC for a specific subscriber can be conveyed to an MSC (14) in another existing ANSI-41 message. For example, the existing ANSI-41 Authentication Directive message (210) can be modified to include additional parameters for this purpose, such as, for example, GC Report Access Types, GC Report Period Start and End, and GC Report Frequency. In response to an external network subscriber's access request (108), a successful GC based on one or more of the parameters included in the order message can be reported to network A or B's operators in a modified Authentication Status Report message (212).

Patent Application Docket #34647-00407USPT P12822US1

The following Table includes a description and format for each of the new GC parameters described above, which can be included in a report order message, response to a report order message, and/or a report message, in accordance with the present invention.

## Table 1

GC Report Access Types - Access types for which successful GCs are reported.

HCFEDCBA	$\Omega a + a +$	7727110
HE EEDEBA	OCLEL	value

00000000	1	0	No successful GCs
00000001	1	1	to be reported. Report successful GCs for all access
00000010	1	2	types. Report successful GCs for
00000100	1	4	registrations. Report successful
			GCs for originating calls.
00001000	1	8	Report successful GCs for terminating
			calls.
00010000	1	16	Report successful GCs for originating
			short messages.

GC Report Period Start, GC Report Period End - Report successful GCs that occur during a predetermined period of time (between GC Report Period Start and End).

GC Report Frequency - Report every nth successful GC.

HGFEDCBA Octet Value

n

## Table 1 (Cont'd)

GC Report HLR Address - Report successful GCs for subscribers registered in a specific HLR. GC Report MSCID Start, GC Report MSCID End - Report successful GCs for subscribers with subscriber numbers in a predetermined range (between MSCID Start and End). GC Report HGFEDCBA Octet Value 0 Not used. 00000000 1 GC successful. 1 00000001 1 GC Report Success Access Types HGFEDCBA Octet Value 0 Not used. 00000000 1 Report is for 1 00000001 registration access GC. Report is for 0000010 originating call GC. 3 Report is for 00000011 1 terminating call GC. Report is for 00000100 1 originating Short Message Service GC. GC Report Time - The instant of time that a successful GC occurred.

Patent Application Docket #34647-00407USPT P12822US1

Although a preferred embodiment of the method and apparatus of the present invention has been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the embodiment disclosed, but is capable of numerous rearrangements, modifications and substitutions without departing from the spirit of the invention as set forth and defined by the following claims.

2

3

4

5

6

7

8

9

10

11

12

13

14

15

Patent Application Docket #34647-00407USPT P12822US1

#### WHAT IS CLAIMED IS:

 A method for monitoring authentication performance in a wireless communication network, comprising the steps of:

sending an authentication report order message to a mobile switching center in said wireless communication network, said authentication report order message including at least one authentication parameter;

determining whether an access request made to said wireless communication network is authenticated based on said at least one authentication parameter; and

if said access request is authenticated based on said at least one authentication parameter, said mobile switching center transmitting an authentication report.

2. The method of Claim 1, further comprising the step of said mobile switching center transmitting an acknowledgment message responsive to said authentication report order message.

8

- The method of Claim 1, wherein said authentication
   report order message comprises a Global Challenge Report
   Directive message.
- 4. The method of Claim 3, wherein said Global Challenge
  5 Report Directive message is formatted in accordance with an
  6 ANSI-41 protocol.
  - 5. The method of Claim 1, wherein said authentication report order message comprises an ANSI-41 Registration Notification Return Result message.
- 10 6. The method of Claim 1, wherein said authentication 11 report order message comprises an ANSI-41 Qualification 12 Directive message.

8

- 7. The method of Claim 1, wherein said authentication report order message comprises an ANSI-41 Authentication Directive message.
- 8. The method of Claim 2, wherein said acknowledgment message comprises a Global Challenge Report Directive Response message.
  - 9. The method of Claim 1, wherein said authentication report comprises a Global Challenge Report message formatted in accordance with an ANSI-41 protocol.
- 10. The method of Claim 1, wherein said authentication 11 report comprises an ANSI-41 Authentication Status Report 12 message.
- 13 11. The method of Claim 1, wherein said wireless
  14 communication network comprises an ANSI-41 network.

- 1 12. The method of Claim 1, wherein the transmitting step
- 2 comprises transmitting said authentication report to an external
- 3 network node.

Patent Application Docket #34647-00407USPT P12822US1

13. A system for monitoring authentication performance in a wireless communication network, comprising:

a mobile switching center associated with said wireless communication network;

an external network node, said external network node coupled to said mobile switching center by an inter-network transmission interface;

means for sending an authentication report order message to said mobile switching center, said authentication report order message including at least one authentication parameter; and

means for determining whether an access request made to said wireless communication network is authenticated based on said at least one authentication parameter, said mobile switching center including means for transmitting an authentication report if said access request is authenticated based on said at least one authentication parameter.

2

3

4

5

6

7

8

9

10

11

- 14. The system of Claim 13, wherein said mobile switching center further comprises means for transmitting an acknowledgment message responsive to said authentication report order message.
  - 15. The system of Claim 13, wherein said authentication report order message comprises a Global Challenge Report Directive message.
  - 16. The system of Claim 13, wherein said authentication report order message comprises a Global Challenge Report Directive message formatted in accordance with an ANSI-41 protocol.
- 17. The system of Claim 13, wherein said authentication 13 report order message comprises an ANSI-41 Registration 14 Notification Return Result message.

8

9

- 1 18. The system of Claim 13, wherein said authentication 2 report order message comprises an ANSI-41 Qualification 3 Directive message.
- 19. The system of Claim 13, wherein said authentication report order message comprises an ANSI-41 Authentication Directive message.
  - 20. The system of Claim 14, wherein said acknowledgment message comprises a Global Challenge Report Directive Response message.
- 10 21. The system of Claim 13, wherein said authentication 11 report comprises a Global Challenge Report message formatted in 12 accordance with an ANSI-41 protocol.

7

8

- 1 22. The system of Claim 13, wherein said authentication 2 report comprises an ANSI-41 Authentication Status Report 3 message.
- 23. The system of Claim 13, wherein said wireless communication network comprises an ANSI-41 network.
  - 24. The system of Claim 13, wherein said means for transmitting comprises means for transmitting said authentication report to said external network node.

10

15

Patent Application Docket #34647-00407USPT P12822US1

# METHOD FOR MONITORING AUTHENTICATION PERFORMANCE IN WIRELESS COMMUNICATION NETWORKS

#### ABSTRACT OF THE DISCLOSURE

A method for monitoring network authentication performance in wireless communication systems is disclosed, whereby a standardized message will be used to enable external reporting of a selection of (or all) successful Global Challenges. A network operator can select which Global Challenge results are to be reported, based on one or more factors such as, for example: subscriber number series (i.e., if a subscriber's number is within a predetermined range, then a successful Global Challenge can be reported); predetermined periodicity (i.e., the nth successful Global Challenge for a subscriber or MSC/VLR can be reported); access type (i.e., a successful Global Challenge for a Registration request, Originating Calls, Terminating Calls, and/or Originating Short Messages can be reported), etc.

FIG. 1

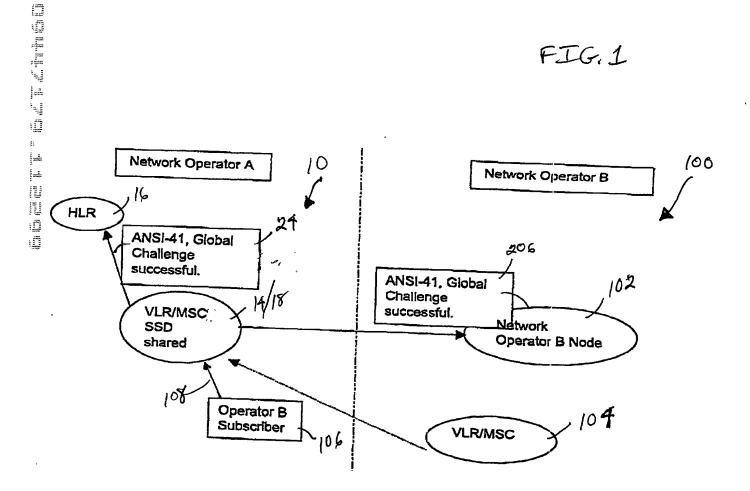


FIG. 2


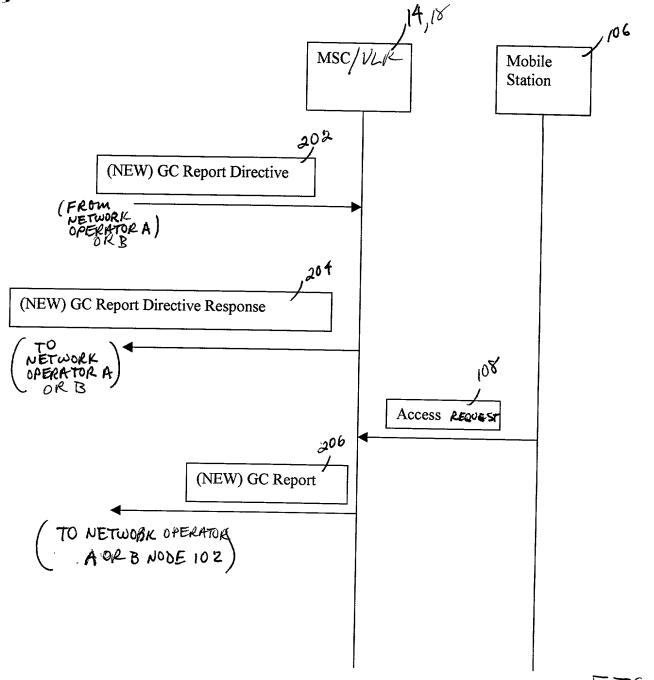


FIG. 3

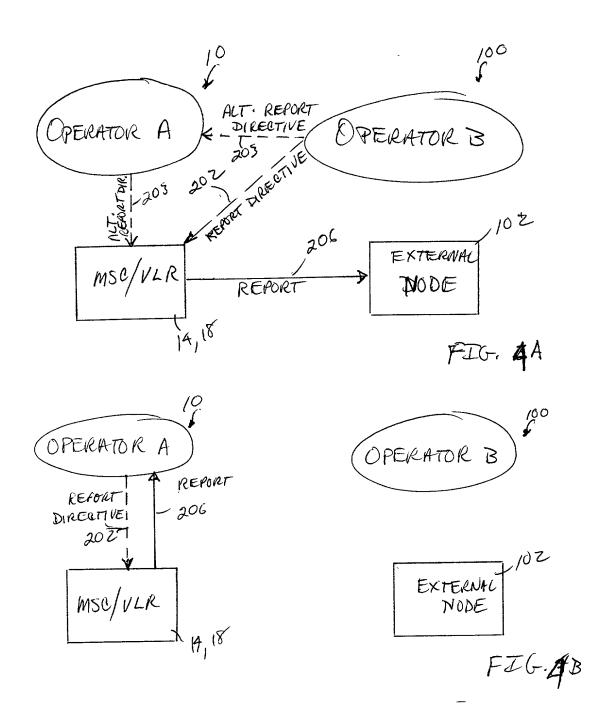

PATENT APPLICATION DOCKET NO.: 34647-00407USPT

## RULES 63 AND 67 (37 C.F.R. 1.63 and 1.67) DECLARATION AND POWER OF ATTORNEY

#### FOR UTILITY/DESIGN/CIP/PCT NATIONAL APPLICATIONS

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: METHOD FOR MONITORING AUTHENTICATION PERFORMANCE IN WIRELESS COMMUNICATION NETWORKS, the specification of which: (mark only one)

X (a	a) is attached hereto.	
(t	was filed on as Application Serial No	and was
	amended on (if applicable)	
(0	e) was filed as PCT International Application No. PCT/	on and
	was amended on (if applicable).	
(0	d) was filed on as Application Serial No	and was
	issued a Notice of Allowance on	
(6	e) was filed on and bearing attorney docket number	·

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims as amended by any amendment referred to above or as allowed as indicated above.

I acknowledge the duty to disclose all information known to me to be material to the patentability of this application as defined in 37 CFR § 1.56. If this is a continuation-in-part (CIP) application, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability of the application as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this CIP application.

I hereby claim foreign priority benefits under 35 U.S.C. § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me or my assignee disclosing the

subject matter claimed in this application and having a filing date (1) before that of the application on which my priority is claimed or, (2) if no priority is claimed, before the filing date of this application:

#### PRIOR FOREIGN PATENTS

<u>Number</u>	Country	Month/Day/Year Filed	Date first laid-open or Published	Date patented or Granted	Priority (Yes	Claimed <u>No</u>
-				<del></del>		

I hereby claim the benefit under 35 U.S.C. § 120/365 of any United States application(s) listed below and PCT international applications listed above or below:

#### PRIOR U.S. OR PCT APPLICATIONS

Application No. (series code/serial no.)	Month/Day/Year Filed	Status(pending, abandoned, patented)
		<del></del>

I hereby appoint:

TIMOTHY G. ACKERMANN Reg. No. 44,493 THOMAS E. ANDERSON Reg. No. 37,063 JEFFERY E. BACON Reg. No. 35,055 ARTHUR BRADY Reg. No. 42,356 THOMAS L. CANTRELL Reg. No. 20,849 THOMAS L. CRISMAN Reg. No. 24,846 WILLIAM F. ESSER Reg. No. 38,053 STUART D. DWORK Reg. No. 31,103 H. MATHEWS GARLAND Reg. No. 19,129 J. KEVIN GRAY Reg. No. 37,141 STEVEN R. GREENFIELD Reg. No. 38,166 J. PAT HEPTIG Reg. No. 40,643 JOHN R. KIRK JR. Reg. No. 24,477

ROBERT WILLIAM MASON Reg. No. 42,848 ROGER L. MAXWELL Reg. No. 31,855 ROBERT A. McFALL Reg. No. 28,968 LISA H. MEYERHOFF Reg. No. 36,869 MICHELE MOBLEY Reg. No. 35,616 STANLEY R. MOORE Reg. No. 26,958 RICHARD J. MOURA Reg. No. 34,883 MARK V. MULLER Reg. No. 37,509 P. WESTON MUSSELMAN JR. Reg No. 31,644 RUSSELL N. RIPPAMONTI Reg. No. 39,521 HOLLY L. RUDNICK Reg. No. 43,065 KEITH W. SAUNDERS Reg. No. 41,462 JERRY R. SELINGER Reg. No. 26,582

KEVIN J. SIMONS Reg. No. 45,110
BOBBY SLATON Reg. No. 43,130
GARY B. SOLOMON, P-44,347
WAYNE O. STACEY Reg. No. 45,125
SCOTT B. STAHL Reg. No. 33,795
ROBERT C. STRAWBRICH, Reg. No. 36,692
ANDRE M. SZUWALSKI Reg. No. 35,701
ALAN R. THIELE Reg. No. 30,694
WILLIAM J. TUCKER Reg. No. 41,356
TAMSEN VALOIR Reg. No. 41,417
RAYMOND VAN DYKE Reg. No. 34,746
BRIAN D. WALKER Reg. No. 37,751
GERALD T. WELCH Reg. No. 30,332

all of the firm of **JENKENS & GILCHRIST**, **P.C.**, 3200 Fountain Place, 1445 Ross Avenue, Dallas, Texas 75202-2799, as my attorneys and/or agents, with full power of substitution and revocation, to prosecute this application, provisionals thereof, continuations, continuations-in-part, divisionals, appeals, reissues, substitutions, and extensions thereof and to transact all business in the United States Patent and Trademark Office connected therewith, to appoint any individuals under an associate power of attorney and to file and prosecute any international patent application filed thereon before any international authorities, and I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/organization who/which first sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct them in writing to the contrary.

Please address all correspondence and direct all telephone calls to:

Richard J. Moura Jenkens & Gilchrist, P.C. 3200 Fountain Place 1445 Ross Avenue Dallas, Texas 75202-2799 214/855-4709 214/855-4300 (fax)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## NAMED INVENTOR(S)

	Barry O'Driscoll				
	Full Name	Inventor's Signature	Date		
1	Coolgreaney Gorey, Co. Wexford IRELAND	Ireland			
	Residence (city, state, country)	Citizen	ship		
	Coolgreaney Gorey, Co. Wexford IRELAND				
	Post Office Address (include zip code	)			